


PROBE WITH STAINLESS STEEL SLEEVE

PLUG-IN THERMOCOUPLE WITH CONNECTION CABLE T260

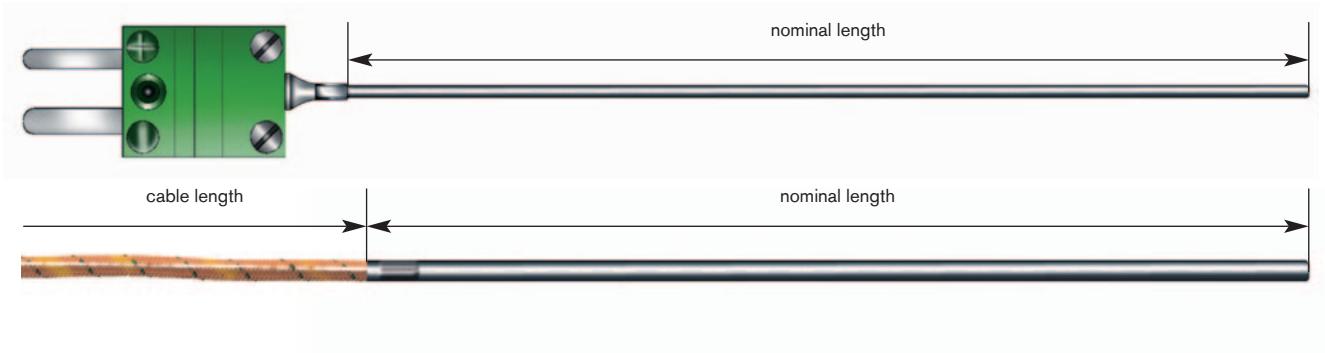

connection cable	construction	temperature
<input type="checkbox"/> THEL 0,22 mm ²	strand/fiber glass/fiber glass/Pi foil	+400°C
<input type="checkbox"/> THEL 0,22 mmØ	wire/Pi foil/Pi foil, bare wire (+ leg)	+400°C

Thermocouple:

- 1 x type L
- 1 x type J
- 1 x type K
- other thermocouples: _____

type J and K acc. to DIN EN 60584
type L acc. to DIN 43710

Sleeve-Ø:

- 1,5 mm (only possible with THEL 0,20 mmØ)
- 3,0 mm

Type of cable ends:

- bare ends
- cable lugs M4
- end sleeve
- miniature plug
- miniature sockets
- other cable ends: _____

Connection cable:

- 1,0 mm
- 1,5 mm
- 2,0 mm
- 2,5 mm
- 3,0 mm
- 4,0 mm
- 5,0 mm
- 10,0 mm
- other cable length: _____

Type of measuring tip:

- Form A, insulated measuring tip
- Form B, welded measuring tip

Nominal length: _____ mm



**High temperature probe
with stainless steel sleeve!**