


PROBE WITH STAINLESS STEEL SLEEVE

RESISTANCE PROBE WITH CONNECTION CABLE T521

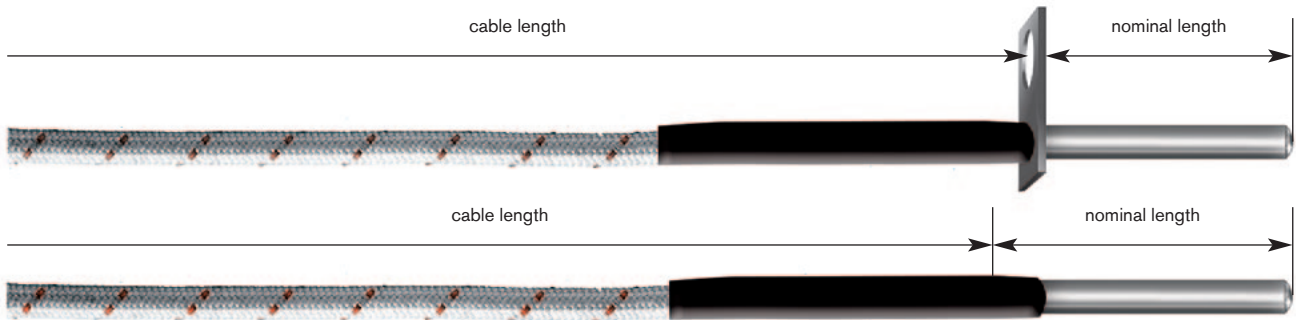

connection cable	construction	temperature
<input type="checkbox"/> RRL 0,22 mm ²	strand/fiber glass/fiber glass	+400°C

RTD:

- 1 x Pt 100 class B
- 1 x Pt 100 class A
- other RTDs: _____

Pt 100 acc. to DIN EN 60751

Connection type of inner wires:

- 2 - wire circuit
- other connection type: _____

Sleeve-Ø:

- 3,5 mm

Type of cable ends:

- bare ends
- end sleeve
- cable lugs M4
- other cable ends: _____

Connection cable:

- 1,0 mm
- 1,5 mm
- 2,0 mm
- 2,5 mm
- 3,0 mm
- 4,0 mm
- 5,0 mm
- 10,0 mm
- other cable length: _____

Kink protection:

- kink protection with shrinkable sleeve

Nominal length:

- 30 mm
- other nominal length: _____ mm



- with mounting plate 8 x 15 mm, hole Ø 5 mm