


# PROTECTING ARMATURES FOR GAUGE SLIDES

## T411 / T413

Immersion protecting armatures for gauge slides  $\varnothing$  3 mm /  $\varnothing$  8 mm

### T413 / FOR GAUGE SLIDE $\varnothing$ 3 mm

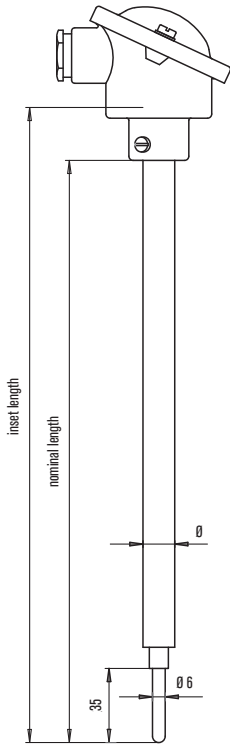

#### PROTECTING TUBE FORM AS TAPERED MEASURING TIP (QUICK RESPONSE TIME):

- 1.0305  $\varnothing$  15 x 2 mm
- 1.4762  $\varnothing$  15 x 2 mm
- 1.4571  $\varnothing$  15 x 2 mm
- 1.4841  $\varnothing$  15 x 2 mm

#### GAUGE SLIDE:

- without gauge slide
- with gauge slide: \_\_\_\_\_

#### FIXING:

- without
- with screw socket G3/4 A
- with flange
- with screw socket G1 A
- with screw socket G1/2 A
- with screwed plug G1/2 A

#### CONNECTION HEAD:


- B (KE 021)
- DAN-WZ (KE 201)
- DAN-Z (KE 063)
- DAN-WS (KE 203)
- DAN-S (KE 065)
- BNK (KK 028)
- other connection head: \_\_\_\_\_

#### NOMINAL LENGTH / INSET LENGTH:

- 500/ 525 mm
- 1400/1425 mm
- 250/275 mm
- 710/ 735 mm
- 2000/2025 mm
- 355/380 mm
- 1000/1025 mm
- 180/ 205 mm
- other length: \_\_\_\_\_

#### ADDITIONAL INFORMATION:

### T411 / FOR GAUGE SLIDE $\varnothing$ 8 mm

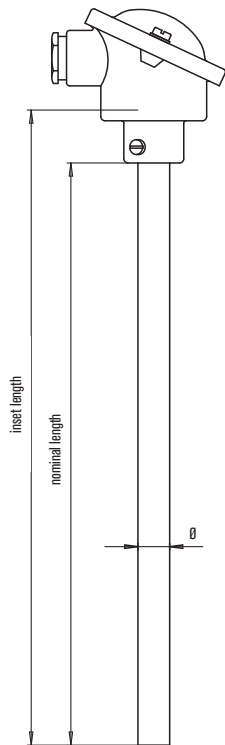

#### PROTECTING TUBE FORM A ACC. TO DIN 43763:

- 1.0305  $\varnothing$  15 x 3 mm
- 1.4762  $\varnothing$  15 x 2 mm
- 1.4571  $\varnothing$  15 x 2 mm, tip 15 x 3 mm
- 1.4841  $\varnothing$  15 x 2 mm

#### GAUGE SLIDE:

- without gauge slide
- with gauge slide: \_\_\_\_\_

#### FIXING:

- without
- with screw socket G3/4 A
- with stop flange
- with screw socket G1 A
- with screw socket G1/2 A
- with screwed plug G1/2 A

#### CONNECTION HEAD:

- B (KE 021)
- DAN-WZ (KE 201)
- DAN-Z (KE 063)
- DAN-WS (KE 203)
- DAN-S (KE 065)
- BNK (KK 028)
- other connection head: \_\_\_\_\_

#### NOMINAL LENGTH / INSET LENGTH:

- 500/ 525 mm
- 1400/1425 mm
- 250/275 mm
- 710/ 735 mm
- 2000/2025 mm
- 355/380 mm
- 1000/1025 mm
- 180/ 205 mm
- other length: \_\_\_\_\_

#### ADDITIONAL INFORMATION: