


# PROTECTING ARMATURES FOR GAUGE SLIDES

## T425 / T427

Flange protecting armature for gauge slides  $\varnothing$  3 mm /  $\varnothing$  6 mm

### T427 / FOR GAUGE SLIDE $\varnothing$ 3 mm

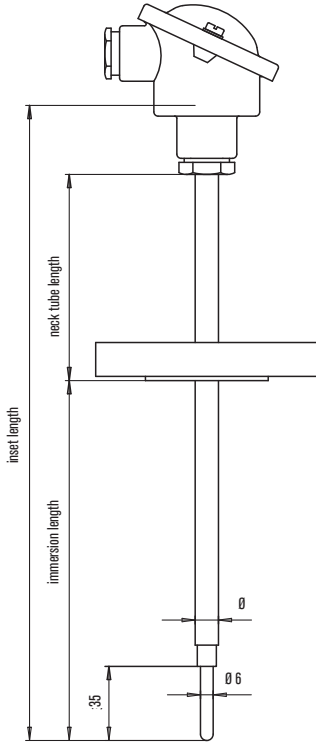

#### PROTECTING TUBE FORM FS WITH TAPERED MEASURING TIP (QUICK RESPONSE TIME):

- 1.4571  $\varnothing$  11 x 2 mm
- 1.4571  $\varnothing$  11 x 2 mm - HALAR® - coating

#### GAUGE SLIDE:

- without gauge slide
- with gauge slide: \_\_\_\_\_

#### FLANGE:

- DN 20 PN 40 DIN EN 1092-1
- DN 40 PN 40 DIN EN 1092-1
- DN 25 PN 40 DIN EN 1092-1
- DN 50 PN 40 DIN EN 1092-1

#### CONNECTION HEAD:

- B (KE 122)
- DAN-Z (KE 064)
- DAN-S (KE 066)
- DAN-WZ (KE 202)
- DAN-WS (KE 204)
- BNK (KK 029)
- without
- other connection head: \_\_\_\_\_


#### INSET / NECK TUBE / IMMERSION LENGTH:

- 100/120/255 mm
- 160/120/315 mm
- 250/120/405 mm
- 400/120/555 mm
- other length: \_\_\_\_\_

#### ADDITIONAL INFORMATION:

---

### T425 / FOR GAUGE SLIDE $\varnothing$ 6 mm

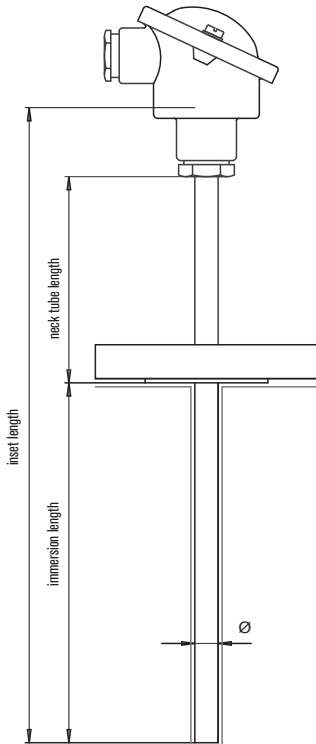

#### PROTECTING TUBE FORM FS WITH TAPERED MEASURING TIP (QUICK RESPONSE TIME):

- 1.4571  $\varnothing$  11 x 2 mm
- 1.4571  $\varnothing$  11 x 2 mm - HALAR® - coating

#### GAUGE SLIDE:

- without gauge slide
- with gauge slide: \_\_\_\_\_

#### FLANGE:

- DN 20 PN 40 DIN EN 1092-1
- DN 40 PN 40 DIN EN 1092-1
- DN 25 PN 40 DIN EN 1092-1
- DN 50 PN 40 DIN EN 1092-1

#### CONNECTION HEAD:

- B (KE 122)
- DAN-Z (KE 064)
- DAN-S (KE 066)
- DAN-WZ (KE 202)
- DAN-WS (KE 204)
- BNK (KK 029)
- without
- other connection head: \_\_\_\_\_

#### INSET / NECK TUBE / IMMERSION LENGTH:

- 100/120/255 mm
- 160/120/315 mm
- 250/120/405 mm
- 400/120/555 mm
- other length: \_\_\_\_\_

#### ADDITIONAL INFORMATION:

---